

NEW/USED ENGINE DRIVEN PUMPS

1. **Gorman Rupp model VPA4A60C-3CH FT4; 4" x 4" Priming Assisted Solids Handling Centrifugal Pump w/Auto-Start Control S/N 1646709 SKID MOUNTED**
NEW LIST PRICE: \$29,590.00 NEW



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous performance				
P.S.I.	Feet					
49.0	113	195	195	195	195	195
43.4	100	310	310	310	310	310
34.7	80	341	486	505	505	505
26.0	60	356	515	638	680	680
17.3	40	370	541	655	760	840
8.7	20	380	551	669	760	912
Suction Lift		25'	20'	15'	10'	5

ENGINE SPECIFICATIONS

Model: Isuzu 3CH1
EPA Tier: Final Tier 4
Type: Three Cylinder, Diesel Engine
Displacement: 97.6 Cu. In. (1.6 Liters)
Lubrication: Forced Circulation
Governor: Mechanical
Air Cleaner: Dry Type
Fuel Tank: 34 U.S. Gallons (128.7 Liters)
Full Load Operating Time: 21.9 Hours
Starter: 12Volt Electric

2. Gorman Rupp model T6A60S-4045T; Self-Priming Solids Handling Centrifugal Pump
w/Auto-Start, 6" x 6" S/N 1668760

SALE PRICE: \$42,163.00 **NEW DEMO Engine Hours .3**

Dun-Rite Custom Manufactured tandem axle trailer model 2PC7M-7214

(14' x 72" deck, 16" tires, fender high screened side rails, tail gate, spare tire, custom hose racks, 10K drop leg jack)

VIN#1D9CP142XLC398747

SALE PRICE: \$8,260.00 **NEW [Note: Trailer Invoiced Separate for Tax Purposes]**



ENGINE SPECIFICATIONS

Model: John Deere 4045T

EPA Tier: 3

Type: 4 Cylinder, Four Cycle, Turbocharged, Liquid Cooled Diesel Engine

Displacement: 276 Cu. In. (4.5 Liters) 72 BHP @ 2400 RPM

Lubrication: Forced Circulation

Air Cleaner: Dry Type

Fuel Tank: 88 U.S. Gal. (330 liters)

Full Load Operating Time: 30.1 Hrs.

Starter: 12V Electric



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous Performance			
P.S.I.	Feet				
59.0	136	400	400	400	400
52.0	120	730	760	760	760
43.3	100	750	1050	1170	1170
34.7	80	760	1060	1290	1460
26.0	60	770	1070	1300	1500
17.3	40	780	1080	1310	1510
Suction Lift		25'	20'	15'	10'

3. Gorman Rupp model PAH4E60-6068H High Head Priming Assisted Solids Handling Centrifugal Pump w/Auto-Start 6" x 4" S/N 1661962
 SALE PRICE: \$74,500.00 Demo Unit Engine/Pump Hours: 228.7

Dun-Rite Custom Manufactured Tandem axle trailer model 2CP7M-7214 (14,000# GVW, 14' x 72" deck, 16" tires, 10K drop leg jack, tail gate, fender high screened side rails)
 VIN#1D9CP1428LC398746
 SALE PRICE: \$8,260.00 NEW [Note: Trailer Invoiced Separate for Tax Purposes]



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous Performance					
P.S.I.	Feet						
180.3	416	440	440	-	-	-	-
173.4	400	520	600	-	-	-	-
156.1	360	600	820	-	-	-	-
138.7	320	660	870	980	980		980
121.4	280	700	910	1105	1280		1395
104.0	240	730	940	1140	1310		1440
86.7	200	740	960	1160	1340		1470
69.4	160	760	980	1180	1350		1495
52.0	120	770	995	1200	1365		1515
34.7	80	785	1010	1210	1380		1530
17.3	40	800	1020	1225	1400		1550
Suction Lift		25'	20'	15'	10'		5'



Engine Specifications
 Model: John Deere 6068HF285
 EPA Tier: TIER 3
 Type: Six Cylinder, Charge Air Cooled Diesel Engine w/Air Compressor, Enclosed
 Displacement: 415 Cu. In. (6.8 Liters)
 Lubrication: Forced Circulation
 Air Cleaner: Dry Type
 Fuel Tank: 130 U.S. Gallons (492 Liters)
 Full Load Operating Time: 14.8 Hrs.
 Starter: 12V Electric

4. Gorman Rupp model PA4A60-4045T 4" x 4" Diesel Engine Driven Priming Assisted Solids Handling Centrifugal Pump with Auto-Start Control Panel S/N 1660297

Sale Price: \$33,209.00 NEW DEMO Engine Hours: 3.4

**Dun-Rite Custom Manufactured single axle trailer model 1CP7M-7210
(7000# GVW, 10' x 72" deck, 16" tires, 10K drop leg jack, bulldog hitch, tail gate, fender high screened, side rails)**

VIN#1D9CP1015LC398748

Sale Price: \$6,562.00 NEW [NOTE: Trailer Invoiced Separate for Tax Purposes]



Total Head		Capacity of Pump in U.S. Gallons per Minute at Continuous Performance			
P.S.I.	Feet				
58.1	134	220	220	220	220
52.0	120	370	420	420	420
43.4	100	392	545	670	730
34.7	80	405	555	682	810
26.0	60	415	565	694	830
17.3	40	425	575	708	855
Suction Lift		25'	20'	15'	10'



ENGINE SPECIFICATIONS

Model: John Deere 4045T "Power Tech"

EPA Tier: Tier 3

Type: Four Cylinder, Four Cycle, Turbocharged, Liquid Cooled Diesel Engine

Displacement: 275 Cu. In. (4.5 liters)

Governor: Mechanical

Lubrication: Forced Circulation

Air Cleaner: Dry Type

**Oil Reservoir: 17.5 U.S. Qts. (16.5 liters) Dry
15.5 U.S. Qts. (14.7 liters) refill**

Fuel Tank: 61 U.S. Gallons (231 liters)

Full Load Operating Time: 26.8 Hrs.

Starter: 12V Electric

5. Gorman Rupp model VPA4A60C-3CH1 FT4; 4" x 4" Priming Assisted Solids Handling Centrifugal Pump w/Auto-Start Control S/N 1646710 **Engine Hours: 160.9**

Sale Price: \$27,430.00 **USED**

Superior Custom Manufactured single axle trailer model 1TP6M

(7,000# GVW, 10' x 72" Deck, 16" tires, 10K drop leg jack, fender high screened side rails, bulldog hitch, tail gate, spare tire, custom hose racks)

VIN#1S9AP1013LC241012

Sale Price: \$4,962.00 **USED** **[NOTE: Trailer Invoiced Separate for Tax Purposes]**



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous performance				
P.S.I.	Feet					
49.0	113	195	195	195	195	195
43.4	100	310	310	310	310	310
34.7	80	341	486	505	505	505
26.0	60	356	515	638	680	680
17.3	40	370	541	655	760	840
8.7	20	380	551	669	760	912
Suction Lift		25'	20'	15'	10'	5



ENGINE SPECIFICATIONS

Model: Isuzu 3CH1

EPA Tier: Final Tier 4

Type: Three Cylinder, Diesel Engine

Displacement: 97.6 Cu. In. (1.6 Liters)

Lubrication: Forced Circulation

Governor: Mechanical

Air Cleaner: Dry Type

Fuel Tank: 34 U.S. Gallons (128.7 Liters)

Full Load Operating Time: 21.9 Hours

Starter: 12Volt Electric

[Type text]

6. VAUGHAN model THE6W8CS 8" x 6" Horizontal Priming Assisted Chopper Pump

Powered by: Deutz model TCD 3.6 L4 Final TIER 4 Liquid Cooled Diesel Engine.


Packaged by: Barco Pump Company.

SALE PRICE: \$55,474.00 **NEW**

Superior Custom Manufactured tandem axle trailer model 2PT6M VIN#1S9HP142XLC241011.

(Heavy Duty Off-Road, 14' x 72" deck, 14,000# GVW, 10K drop leg jack, 16" tires, fender high screened side rails, tail gate, spare tire, bull-dog hitch, hose racks)

SALE PRICE: \$7,369.00 **NEW** [Note Trailer Invoiced Separate for Tax Purposes]

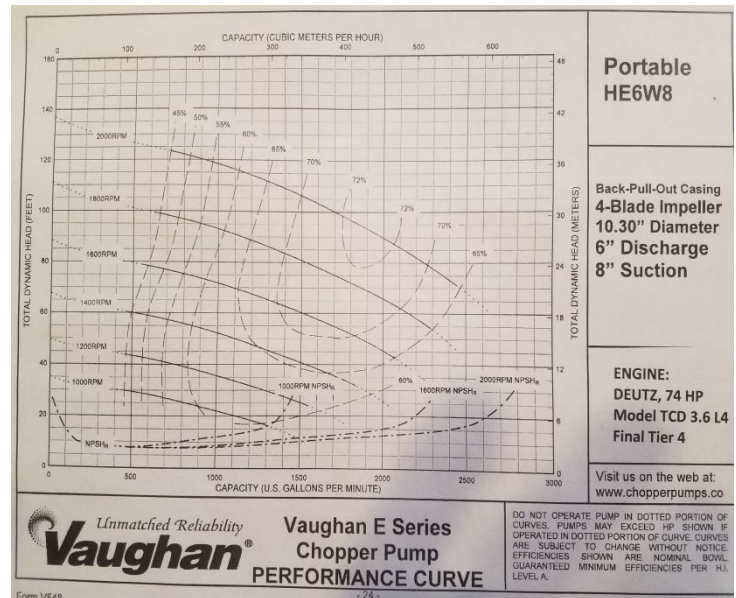

Engine Specifications

Model: Deutz TCD 3.6 L4

EPA Tier: Final Tier 4

Type: Four Cylinder, Four Cycle, Turbocharged, Liquid Cooled Diesel Engine

Displacement: (3.6 liters)

Governor: Mechanical

Lubrication: Forced Circulation

Air Cleaner: Dry Type

Starter: 12V Electric

Fuel Tank: Approx. 75 U.S. Gallons

Full Load Operating Time: Approx. 21 hours



7. Barco model BPGC6611C/Gorman Rupp PA6C60


Assisted, Solids Handling Centrifugal Pump Mounted to High Speed Wheel Kit w/DOT
Lighting, Lifting Bale, Auto-Start Control Panel

6" x 6" Diesel Engine Driven Priming

Current Engine/Pump Hours: 206.4

SALE PRICE: \$48,500.00

USED

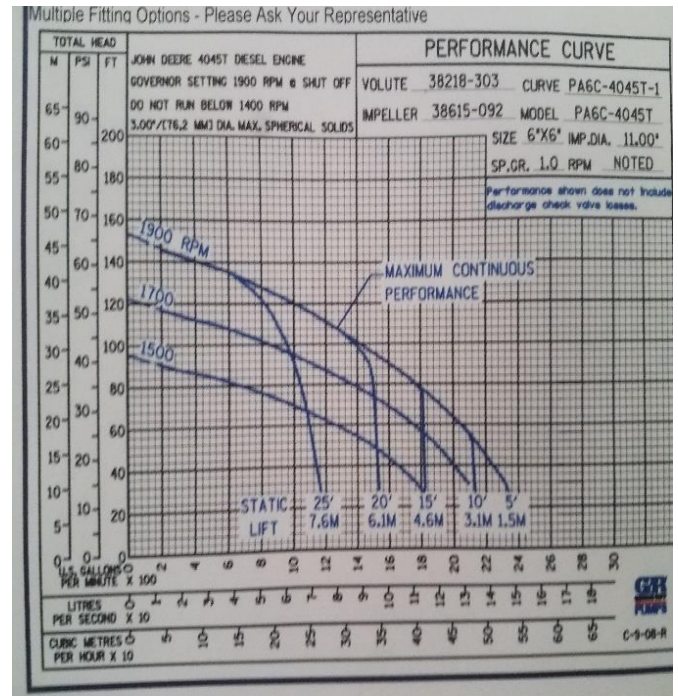

ENGINE SPECIFICATIONS

Manufacturer: Cummins Tier 3

Type: 4 Cylinder Diesel Engine

Cooling: Liquid Cooled

Performance: 110 HP @ 2400 RPM

Displacement: 4.5 liters or 274.6 Cu. In.

Starter: 12V Electric

Fuel Tank: 110 U.S. Gallons

Full Load Operating Time: 18 hours

FEATURES:

Standard Equipment: 6" swing check valve, DOT trailer kit, Battery, Exhaust Rain cap, Lockable Fuel Cap, Automatic Liquid Level Control, Suction/Discharge Gauge Kit.

8. **HYDRA-TECH model HT100DQV Portable Hydraulic Power Unit S/N W0096**

Powered by: John Deere model 6068H Liquid Cooled Tier 3 Diesel Engine

Current Unit Hours: 206

Included with Unit: (1) Hydra-Tech model S8T hydraulic driven submersible trash pump
(Pair) 50' x 1 1/4" x 3000# Pressure and Return Hydraulic Hose
(1) 1/2" x 7/2" Case Drain Hose

List Price: \$96,154.00

List Price: \$16,496.00

List Price: \$3,444.00

List Price: \$325.00

SALE PRICE: \$69,600.00

USED

TOTAL EQUIPMENT NEW LIST PRICE: \$116,419.00



Features

- Skid Frame Chassis with Built-In Fuel Tank and Single Point Lifting Bracket
- Full Enclosure with Sound Proofing and Lockable Doors
- Automatic Engine safety Shutdown
- Variable Piston Hydraulic Pump
- Efficient Hydraulic Oil Cooler
- Dual Spin-On Return Filter w/Indicator
- Variable Speed Control
- Residential Exhaust Muffler
- System Relief Valve
- Pressure Control Switch
- Liquid Filled Pressure Gauge
- Fluid level/ Temperature Gauge
- Recessed Hose Connections
- Color/ White
- Made In USA

This Sound Attenuated Unit is designed to be used in residential areas and other locations where low sound levels are required.

SPECIFICATIONS

Engine: John Deere Diesel (Tier 3)
Horsepower: 99 @ 2400 RPM
Hydraulic Output:.....Variable, Max. 53 GPM
Operating Pressure:.....Maximum 2500 PSI
Hose Port Size:(pressure and return) 1-1/4" NPT
(case drain) 1/2" NPT
Hydraulic Oil:.....(Standard) SAE 20W (ISO 46)
Type AW
Oil Filtration:.....10 Micron (Standard)
Oil Reservoir Capacity:.....50 U.S. Gallons
Fuel Tank Capacity:.....50 U.S. Gallons
Fuel Consumption:.....Approx. 5.19 U.S. Gal/Hr
Noise Levels @ 2000 RPM: 83dB @ 3 ft. 68dB @ 23 ft.

9. Hydra-Tech model HT100DQV Portable Hydraulic Power Unit S/N W0097

Powered by: John Deere model 6068H Liquid Cooled Tier 3 Diesel Engine

Current Unit Hours: 888

Included with Unit: (1) Hydra-Tech model S8T hydraulic driven submersible trash pump
(Pair) 50' x 1-1/4"x 3000# Pressure and Return Hydraulic Hose
(1) 50' x 1/2" case drain hose

List Price: \$96,154.00

List Price: \$16,496.00

List Price: \$3,444.00

List Price: \$325.00

SALE PRICE: \$66,500.00

USED

TOTAL EQUIPMENT NEW LIST PRICE: \$116,419.00



Features

- Skid Frame Chassis with Built-In Fuel Tank and Single Point Lifting Bracket
- Full Enclosure with Sound Proofing and Lockable Doors
- Automatic Engine safety Shutdown
- Variable Piston Hydraulic Pump
- Efficient Hydraulic Oil Cooler
- Dual Spin-On Return Filter w/Indicator
- Variable Speed Control
- Residential Exhaust Muffler
- System Relief Valve
- Pressure Control Switch
- Liquid Filled Pressure Gauge
- Fluid level/ Temperature Gauge
- Recessed Hose Connections
- Color/ White
- Made In USA

This Sound Attenuated Unit is designed to be used in residential areas and other locations where low sound levels are required.

SPECIFICATIONS

Engine: John Deere Diesel (Tier 3)
Horsepower: 99 @ 2400 RPM
Hydraulic Output:.....Variable, Max. 53 GPM
Operating Pressure:.....Maximum 2500 PSI
Hose Port Size:(pressure and return) 1-1/4" NPT
(case drain) 1/2" NPT
Hydraulic Oil:.....(Standard) SAE 20W (ISO 46)
Type AW
Oil Filtration:.....10 Micron (Standard)
Oil Reservoir Capacity:.....50 U.S. Gallons
Fuel Tank Capacity:.....50 U.S. Gallons
Fuel Consumption:.....Approx. 5.19 U.S. Gal/Hr
Noise Levels @ 2000 RPM: 83dB @ 3 ft. 68dB @ 23 ft.

[Type text]

10. Hydra-Tech model HT75DJVW-4045T Diesel Engine Driven Portable Hydraulic Power Unit
S/N Y1162: Powered by John Deere model 4045TF-290 liquid cooled, Enclosed Diesel Engine w/ Full Feature Auto-Start Control Panel, Hannay 12V Electric Hose Reel w/100' x 1" pressure and return hyd. hose.

Sale Price: \$43,335.00 **NEW**

Superior Custom Manufactured tandem axle trailer model 2PT6M12 VIN# 1S9HP142KC241042.

(14' x 72" deck, Heavy Duty Off Road, 16" tires, screened fender high side rails, tail gate, spare tire, bulldog hitch)

Sale Price: \$7369.00 **NEW **[NOTE: Trailer Invoiced Separate for Tax Purposes]****



FEATURES

- John Deere Diesel Engine
- Extended Skid Frame Chassis w/built-in Fork Slots, Lifting Bale, Elec. Hose reel
- Automatic Engine Safety Shutdown
- Pressure Compensated Piston Pump
- Spin-On Return Filter w/Indicator
- Engine Mounted Hydraulic Oil Cooler
- System Relief Valve
- Liquid Filled Pressure Gauge
- Fluid Level temperature Gauge
- Made In USA



SPECIFICATIONS

Dimensions: (Skid Mounted) OAL: 143 ", OAH: 61", OAW: 47"

Weight: 2730 lbs. (Dry)

Engine: John Deere 4045TF-290 liquid cooled diesel TIER 4 (Enclosed)

Horsepower: 75 @ 2300 RPM

Fuel Capacity: 88 U.S. Gallons

Fuel Consumption: Approx. 2.75 gal/hr. @ full load

Engine Controls: Controls Inc. C3M-G8300-AS

- Variable speed throttle
- Emergency shutdown system for high engine temp, low oil pressure, low hyd. oil level, high hyd. oil temp.
- Provision for Auto-Start

Specifications Cont.

- **Hydraulic Output: Variable Maximum 36 GPM (Factory Setting 36 GPM @ 2900 PSI)**
- **Operating Pressure: Maximum 2900 PSI**
- **Hose Ports: 1" quick disconnect couplers, wing nut style.**

11. Hydra-Tech model HT75DJVW-4045T Diesel Engine Driven Portable Hydraulic Power Unit
S/N X0270: Powered by John Deere model 4045TF-290 liquid cooled, Enclosed Diesel Engine w/ Full Feature Auto-Start Control Panel, Hannay Hose Reel w/100' x 1" pressure and return hyd. hose.
Sale Price: \$34,230.00 USED Engine Hours: 326.9
PJ Tandem Axle Trailer 83"x 14' Channel Utility UL14 VIN# 3CVUL1626K2592079

Sale Price: \$3,500.00 USED [NOTE: Trailer Invoiced Separate for Tax Purposes]



FEATURES

- John Deere Diesel Engine
- Extended Skid Frame Chassis w/built-in Fork Slots, Lifting Bale, Elec. Hose reel
- Automatic Engine Safety Shutdown
- Pressure Compensated Piston Pump
- Spin-On Return Filter w/Indicator
- Engine Mounted Hydraulic Oil Cooler
- System Relief Valve
- Liquid Filled Pressure Gauge
- Fluid Level temperature Gauge
- Made In USA



SPECIFICATIONS

Dimensions: (Skid Mounted) OAL: 143 ", OAH: 61", OAW: 47"

Weight: 2730 lbs. (Dry)

Engine: John Deere 4045TF-290 liquid cooled diesel TIER 4 (Enclosed)

Horsepower: 75 @ 2300 RPM

Fuel Capacity: 88 U.S. Gallons

Fuel Consumption: Approx. 2.75 gal/hr. @ full load

Engine Controls: Controls Inc. C3M-G8300-AS

- Variable speed throttle
- Emergency shutdown system for high engine temp, low oil pressure, low hyd. oil level, high hyd. oil temp.
- Provision for Auto-Start

Specifications Cont.

- Hydraulic Output: Variable Maximum 36 GPM (Factory Setting 36 GPM @ 2900 PSI)
- Operating Pressure: Maximum 2900 PSI
- Hose Ports: 1" quick disconnect couplers, wing nut style.

[Type text]

12. Hydra-Tech model HT85DPVW-1104D Diesel Engine Driven Portable Hydraulic Power Unit
S/N X2779 Powered by Perkins model 1104D-44T liquid cooled, Diesel Engine, Hannay Hose Reel w/100' x 1"
pressure and return hyd. hose.

Sale Price: \$40,380.00

USED

Engine Hrs. 267.7

Superior Custom Manufactured tandem axle trailer model 2PT6M12 VIN#1S9HP1429KC241032

Sale Price: \$6,908.00

USED [NOTE: Trailer Invoiced Separate for Tax Purposes]



FEATURES

- Perkins Diesel Engine
- Extended Skid Frame Chassis w/built-in Fork Slots, Lifting Bale, Elec. Hose reel
- Automatic Engine Safety Shutdown
- Pressure Compensated Piston Pump
- Spin-On Return Filter w/Indicator
- Engine Mounted Hydraulic Oil Cooler
- System Relief Valve
- Liquid Filled Pressure Gauge
- Fluid Level temperature Gauge
- Made In USA



SPECIFICATIONS

Dimensions: (Skid Mounted) OAL: 142 ", OAH: 60", OAW: 46.5"

Weight: 2804 lbs. (Dry)

**Engine: Perkins 1104D-44T liquid cooled diesel
Final TIER 4**

Horsepower: 85 @ 2200 RPM

Fuel Capacity: 80 U.S. Gallons

Fuel Consumption: Approx. 4.53 gal/hr. @ full load

Engine Controls: LOFA EL240

- Variable speed throttle
- Emergency shutdown system for high engine temp, low oil pressure, low hyd. oil level, high hyd. oil temp.

Specifications Cont.

- **Hydraulic Output: Variable Maximum 36 GPM (Factory Setting 35 GPM @ 2900 PSI)**
- **Operating Pressure: Maximum 2900 PSI**
- **Hose Ports: 1" quick disconnect couplers, wing nut style.**

13. Gorman Rupp model PA4A60-4045T PSO, 4" x 4" Priming Assisted Solids Handling Centrifugal Pump, w/Auto-Start S/N 1571223 **Engine/Pump Hours: 623**
SALE PRICE: \$14,500.00 **USED**
Mansfield/Gorman Rupp Tandem Axle Over-the-road Trailer model 29313-012
(Diamond Tread Plate Deck, 15" tires, stake pockets, spare tire) VIN#1M9BU1422BM620355
Sale Price: \$2500.00 **USED** **[Note: Trailer Invoiced Separate for Tax Purposes]**



Total Head		Capacity of Pump in U.S. Gallons per Minute at Continuous Performance			
P.S.I.	Feet				
58.1	134	220	220	220	220
52.0	120	370	420	420	420
43.4	100	392	545	670	730
34.7	80	405	555	682	810
26.0	60	415	565	694	830
17.3	40	425	575	708	855
Suction Lift		25'	20'	15'	10'



ENGINE SPECIFICATIONS
Model: John Deere 4045T "Power Tech"
EPA Tier: Tier 3
Type: Four Cylinder, Four Cycle,
Turbocharged, Liquid Cooled Diesel Engine
Displacement: 275 Cu. In. (4.5 liters)
Governor: Mechanical
Lubrication: Forced Circulation
Air Cleaner: Dry Type
Oil Reservoir: 17.5 U.S. Qts. (16.5 liters)
Dry
15.5 U.S. Qts. (14.7 liters)
refill
Fuel Tank: 61 U.S. Gallons (231 liters)
Full Load Operating Time: 26.8 Hrs.
Starter: 12V Electric

14. **Gorman Rupp model 14C2-4024T; 4" x 4" Self-Priming, Solids Handling Centrifugal Pump; Powered By John Deere model 4024T "Power Tech" four cylinder, four cycle, turbocharged, liquid cooled diesel engine; 149 Cu. In. (2.4 Liters); Wheel Kit Mounted S/N 1380737** **Current Engine/Pump Hours: 470**

SALE PRICE: \$12,500.00

USED



Total Head		Capacity of Pump in U.S. Gallons Per Minute (GPM) at Continuous Performance				
P.S.I.	Feet					
50.3	116	110	110	110	110	110
43.4	100	275	350	350	350	350
34.7	80	320	440	530	605	660
26.0	60	322	450	542	625	718
17.3	40	328	453	550	630	722
Suction Lift		25'	20'	15'	10'	5'

Engine Specifications

Model: John Deere 4024T

EPA Tier: Tier 3

Type: Four Cylinder, Four Cycle, Turbocharged, Liquid Cooled Diesel Engine

Displacement: 149 Cu. In. (2.4 Liters)

Governor: Mechanical

Lubrication: Forced Circulation

Air Cleaner: Dry type

Oil Reservoir: 8.5 U.S. Qts. (8 Liters) Dry

7.6 U.S. Qts. (7.2 Liters) Refill

Fuel Tank: 61 U.S. Gallons (231 Liters)

Full Load Operating Time: 30.3 Hrs.

15. Gorman Rupp model T6A60S-4045T-PSO 6" x 6" Diesel Engine Driven Self-Priming Solids Handling Centrifugal Trash Pump w/Auto-Start, Wheel Kit Mounted with lifting Bale.
S/N 1720297

SALE PRICE: \$45,709.00 **NEW**



ENGINE SPECIFICATIONS
Model: John Deere 4045T
EPA Tier: 3
Type: 4 Cylinder, Four Cycle, Turbocharged, Liquid Cooled Diesel Engine
Displacement: 276 Cu. In. (4.5 Liters) 72 BHP @ 2400 RPM
Lubrication: Forced Circulation
Air Cleaner: Dry Type
Fuel Tank: 88 U.S. Gal. (330 liters)
Full Load Operating Time: 30.1 Hrs.
Starter: 12V Electric

Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous Performance			
P.S.I.	Feet				
59.0	136	400	400	400	400
52.0	120	730	760	760	760
43.3	100	750	1050	1170	1170
34.7	80	760	1060	1290	1460
26.0	60	770	1070	1300	1500
17.3	40	780	1080	1310	1510
Suction Lift		25'	20'	15'	10'

Starter: 12V Electric

17. Gorman Rupp model CE10A60-F5L 10" x 10" Diesel Engine Driven Self-Priming Solids Handling Centrifugal Pump, Skid mounted with Lifting Bale S/N 1198889 **Engine Hours: 9585.5**

Sale Price: \$10,850.00



Total Head		Capacity of Pump in U.S. Gallons Per Minute (GPM) at Continuous Performance				
P.S.I.	Feet					
47.3	109	880	880	880	880	880
43.4	100	1400	1640	1640	1640	1640
34.7	80	1720	2200	2520	2760	2760
26.0	60	1870	2400	2760	3070	3360
17.3	40	1980	2520	2920	3190	3440
8.7	20	2040	2580	3040	3280	3480
Suction Lift		25'	20'	15'	10'	5'



ENGINE SPECIFICATIONS
Model: Deutz F5L 912D
Type: Five Cylinder, Four Cycle, Air Cooled Diesel Engine
Displacement: 287 Cu. In. (4.7 liters)
Governor: Mechanical Flyweight
Lubrication: Forced Circulation
Air Cleaner: Oil Bath
Oil Reservoir: 14.8 U.S. Qts. (14 liters) Dry
14.3 U.S. Qts. (13.5 liters) refill
Fuel Tank: 54.7 U.S. Gallons (207 liters)
Full Load Operating Time: 8.4 Hrs.
Starter: 12V Electric

[Type text]

18. Gorman Rupp model PA4A60-1104D-44T 4" x 4" Diesel Engine Driven Priming Assisted Solids Handling Centrifugal Pump S/N 1556441 Engine Hours: 1106.1
SALE PRICE: \$28,533.00 USED

PJ 12' x 82" tandem axle utility trailer
SALE PRICE: \$3,626.00 USED

VIN# 3CVVK122X12577253
[NOTE: Trailer Invoiced Separate for Tax Purposes]



Total Head		Capacity of Pump in U.S. Gallons per Minute at Continuous Performance			
P.S.I.	Feet				
52.9	122	180	180	180	180
52.0	120	220	220	220	220
47.7	110	419	475	475	475
43.4	100	420	565	670	715
39.0	90	425	573	690	805
34.7	80	430	580	705	820
30.3	70	435	585	710	830
26.0	60	439	590	715	835
Suction Lift		25'	20'	15'	10'



ENGINE SPECIFICATIONS

Model: Perkins 1104D-44T

EPA Tier: Tier 3

Type: Four Cylinder, Four Cycle, Turbocharged, Liquid Cooled Diesel Engine

Displacement: 268 Cu. In. (4.4 liters)

Governor: Mechanical

Lubrication: Forced Circulation

Air Cleaner: Dry Type

**Oil Reservoir: 1.56 U.S. gal (8 liters) Dry
1.16 U.S. gal (7.2 liters) refill**

Fuel Tank: 61 U.S. Gallons (231 liters)

Full Load Operating Time: 30.3 Hrs.

Starter: 12V Electric

19. Gorman Rupp model PA4A60-4024T 4" x 4" Diesel Engine Driven Priming Assisted Solids Handling Centrifugal Pump, Wheel Kit Mounted with Lifting Bale
S/N 1538524 **Engine Hours: 2451.8**

SALE PRICE: \$11,000.00



Total Head		Capacity of Pump in U.S. Gallons per Minute at Continuous Performance			
P.S.I.	Feet				
52.9	122	180	180	180	180
52.0	120	220	220	220	220
47.7	110	419	475	475	475
43.4	100	420	565	670	715
39.0	90	425	573	690	805
34.7	80	430	580	705	820
30.3	70	435	585	710	830
26.0	60	439	590	715	835
Suction Lift		25'	20'	15'	10'

ENGINE SPECIFICATIONS
Model: John Deere 4024T "Power Tech"
EPA Tier: Tier 3
Type: Four Cylinder, Four Cycle,
Turbocharged, Liquid Cooled Diesel Engine
Displacement: 149 Cu. In. (2.4 liters)
Governor: Mechanical
Lubrication: Forced Circulation
Air Cleaner: Dry Type
Oil Reservoir: 8.5 U.S. Qts. (8 liters) Dry
7.6 U.S. Qts. (7.2 liters) refill
Fuel Tank: 61 U.S. Gallons (231 liters)
Full Load Operating Time: 30.3 Hrs.
Starter: 12V Electric

Engine Hours: 2134.6

A blue GPR 10000 portable generator is shown from a side-rear perspective. It is mounted on a single-axle trailer with a black tire. The generator's engine compartment is black with a silver handle and a control panel. The blue frame has 'GPR' and '10000' printed on it. The unit is parked on a gravel surface in front of a large white building. Other equipment is visible in the background.

A blue CR Power Systems 139 generator is mounted on a single-axle trailer. The generator has a large black cooling fan housing and a blue vertical support structure with the number '139' on it. The trailer has a hitch and a single black tire with a white rim. In the background, there is a white MPI truck parked next to a large white storage building with the MPI logo. The scene is set in a gravel lot under a clear blue sky.

Starter: 12V Electric